

R-2040

**FIRE EXTINGUISHER MOUNT**  
**FITS 997.2 Stock Seats (Manual/Power)**

**INSTALLATION INSTRUCTIONS**

Step 1. Remove seat from car.


Note: Disconnect both the large connector on the front of the module and also the smaller connector on the side. Also be sure to remove the tie wrap that is holding the harness to a cross member.

Step 2. Lay seat on back to access bottom.


Step 3. Remove the remaining side plug from the module by pushing down on the tab and pulling out.

Step 4. Remove the three mounting screws holding the module bracket to the seat.

At Locations A

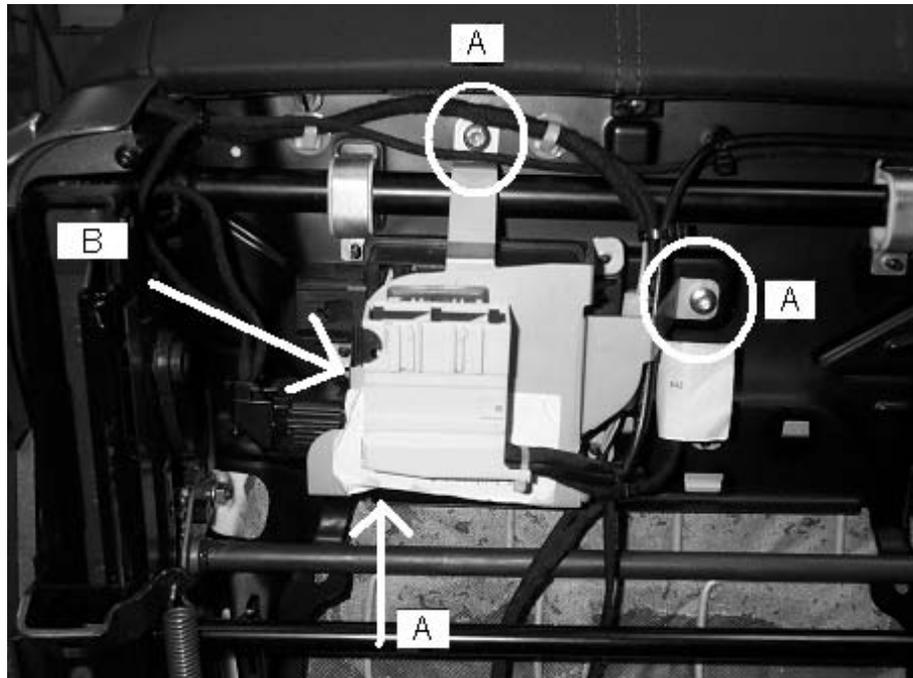


Step 5. Tilt the module to access the mounting hole. Use one of the removed self tapping screws to thread this hole.( At Location B)

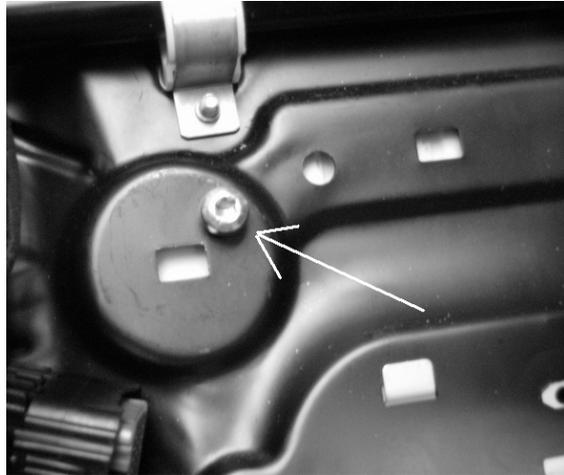


Step 6. Position the fire extinguisher bracket. Install the screw under the module first (the one you just tapped). Align the opposite hole then tighten screw.

Step 7. Slide the front leg of the module through the cutout in the bracket. Install the right mounting screw but do not tighten.

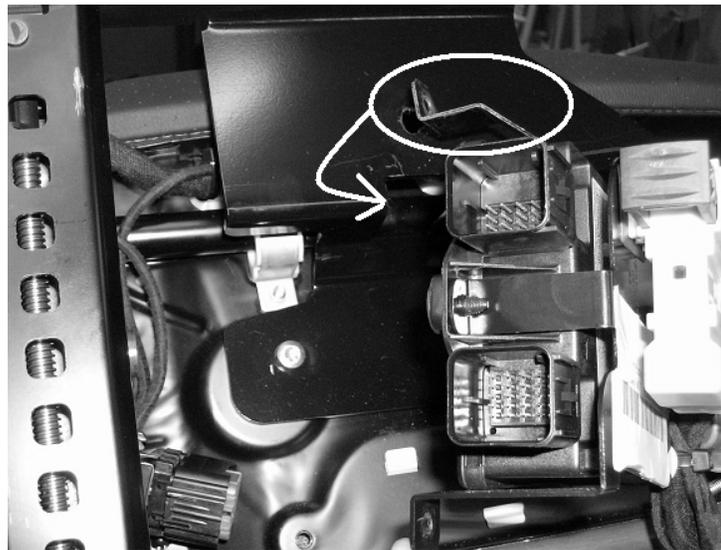

Step 8. Place spacer under front of bracket. Install 6mm X 70mm bolt with washer through spacer and module leg. ( Use a small Allen wrench or awl to align the brackets and the insert bolt). Note: Do not over tighten this bolt.

Step 9. Install the third module bolt and tighten the screw from step 7.

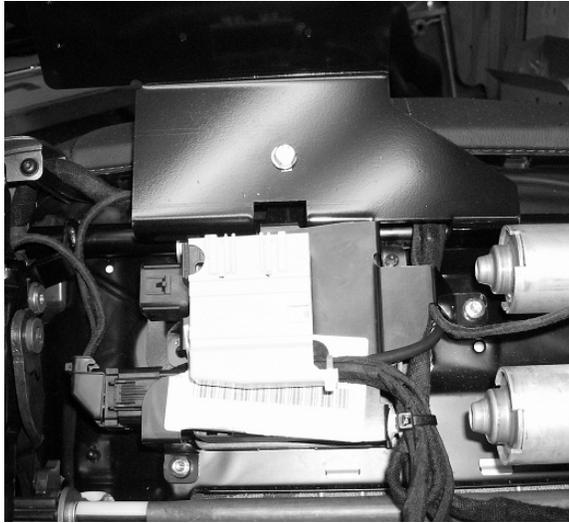

Step 10. Insert the plug removed in step 3.

Step 11. Install seat back in car.

Use the supplied hardware from Brey-Krause to mount the fire extinguisher bottle to the bracket.

Performance driving events are by nature potentially hazardous to your health. Brey-Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.